


Automatic screen printing press **New Facelift Version 2**

Speed
up to **1340 pcs/hr**

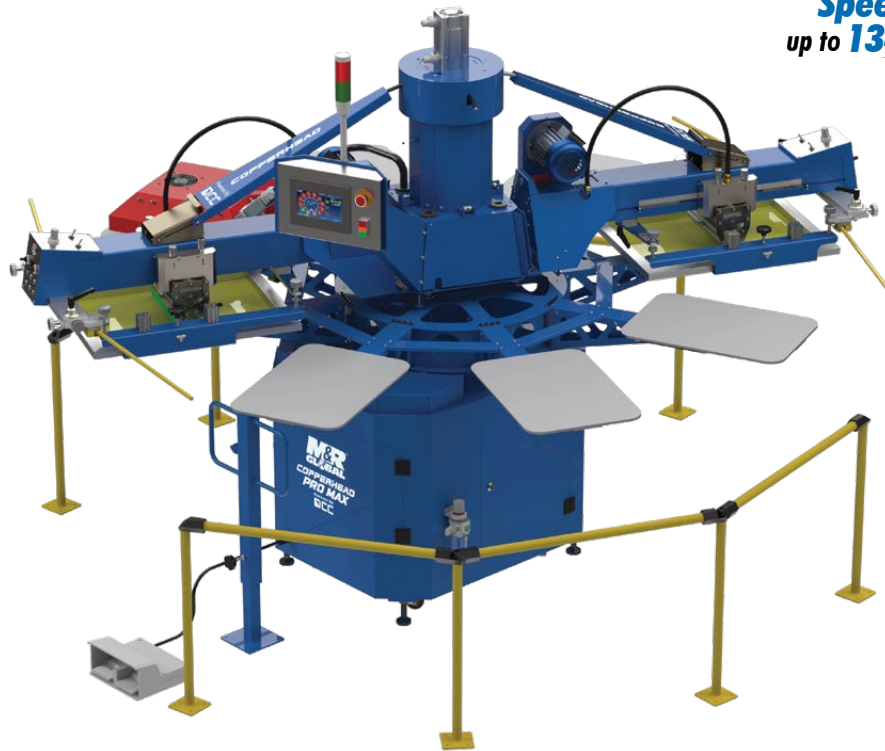

M&R Global's Copperhead Pro Max presses are the benchmark in automatic screen printing presses, combining highest quality components, leading-class craftsmanship and high-speed production to create an outstanding press at an affordable price. The all new upgraded design with front screen loading and side screen holders assist operators for quick setup and allow convenient front and rear screen adjustments.

An electric indexing system enables extremely smooth and quiet operation. The included, innovative squeegee pressure equalizer system with regulators on each printhead speeds setup and ensures uniform ink deposit for excellent print quality.

Electric printheads, tool-free squeegee/floodbar angle adjustment, pneumatic screen frame clamps and independent squeegee/flood speeds provide operators with all the time-saving features needed for quick setups. The Copperhead Pro Max is compatible with M&R Tri-Loc[®] system for the ultimate in print registration speed, accuracy and consistency.

FEATURES


- **Maximum Image Size: 36 x 34 cm (14" x 13.5")**
- **Standard Pallet Size: 38 x 56 cm (15" x 22")**
- **Micro-registration with visual guides**
- **Standard Pneumatic Frame Locks**
- **High-Resolution Touchscreen Control Panel With Easy-to-use, Icon-based Logic And Built-in Tutorial Screens**

Find more information and where to buy at: www.mrprintglobal.com


Compact Equipment • Quiet Operation • Tool-Free Adjustments

Ensures consistent & strong pressure all over the print area to deliver uniform ink deposit.

By properly managing printing ink distribution, the Copperhead print head design increases print speeds to achieve higher production while using the least amount of print strokes.

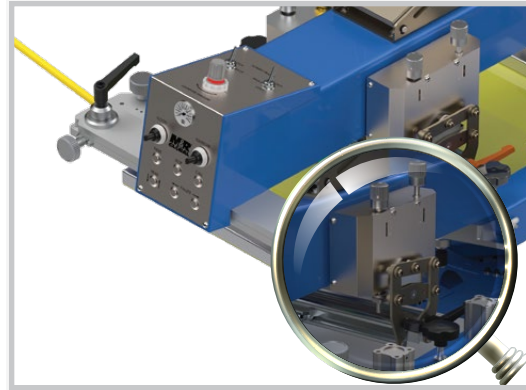

The Squeegee Equalizer System

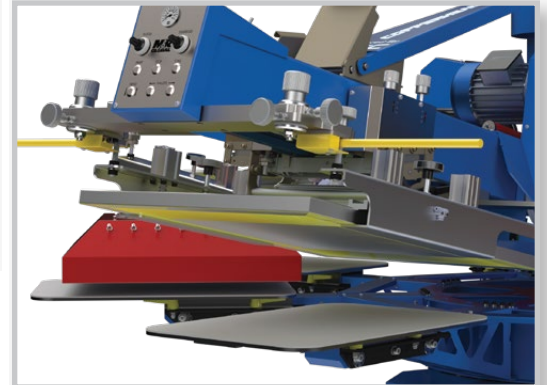

Individual mechanical head lifts assist operators for quick and easy screen cleaning

SPECIFICATIONS	PRO MAX 8/3/1F
Air @ 7 Bar (102 psi)	235 l/min (8.3 cfm)
Electrical Requirements ¹	208-230 V, 3 ph, 43.5A, 50/60 Hz, 8.5 kW (UL) 380-415 V, 3 ph, 43.2A, 50 Hz, 8.5 kW (CE)
Maximum In-built Flash Cure Units	3
Diameter	290 cm (114")
Maximum Frame Size	51 x 69 cm (20" x 27") OD
Maximum Image Area	36 x 34 cm (14" x 13.5")
Machine Weight	326 kg (719 lb)
Standard Pallet Size	38 x 56 cm (15" x 22")
Stations/Colors/In-built Flash	8/3/1

¹ Use uninterruptible power supply (UPS) to safeguard machine from voltage fluctuation out of main supply. If incoming voltage differs from the voltage(s) listed in the brochure, calculate amperage accordingly. Contact M&R Global/your nearest dealer for total amperage in case of using additional In-head flash units.

M&R Printing Equipment, Inc. • www.mrprint.com
 440 Medinah Road, Roselle, Illinois 60172-2329 USA

DCC Group • www.mrprintglobal.com
 802, Kamla Executive Park, JB Nagar, Andheri (E), Mumbai, 400059, India

USA: 800-736-6431 / 630-858-6101 • Outside USA: +1-847-967-4461 • India: +91 98719-88775