


Automatic screen printing press **New Facelift Version 2**

Speed
up to **1340 pcs/hr**

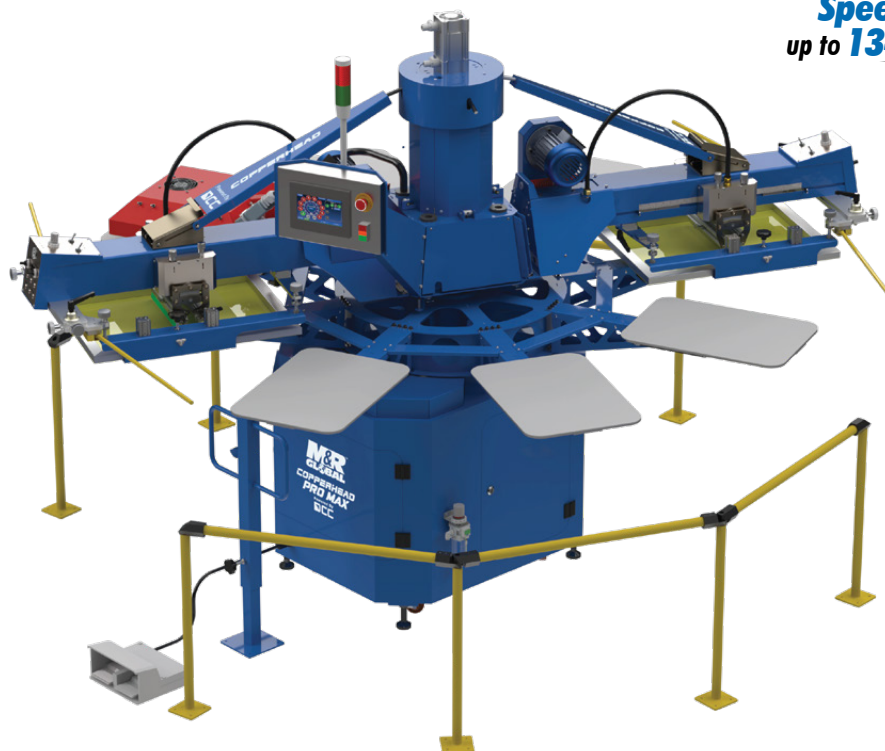

M&R Global's Copperhead Pro Max presses are the benchmark in automatic screen printing presses, combining highest quality components, leading-class craftsmanship and high-speed production to create an outstanding press at an affordable price. The all new upgraded design with front screen loading and side screen holders assist operators for quick setup and allow convenient front and rear screen adjustments.

An electric indexing system enables extremely smooth and quiet operation. The included, innovative squeegee pressure equalizer system with regulators on each printhead speeds setup and ensures uniform ink deposit for excellent print quality.

Electric printheads, tool-free squeegee/floodbar angle adjustment, pneumatic screen frame clamps and independent squeegee/flood speeds provide operators with all the time-saving features needed for quick setups. The Copperhead Pro Max is compatible with M&R Tri-Loc® system for the ultimate in print registration speed, accuracy and consistency.

FEATURES


- **Maximum Image Size: 36 x 34 cm (14" x 13.5")**
- **Standard Pallet Size: 38 x 56 cm (15" x 22")**
- **Micro-registration with visual guides**
- **Standard Pneumatic Frame Locks**
- **High-Resolution Touchscreen Control Panel With Easy-to-use, Icon-based Logic And Built-in Tutorial Screens**

Find more information and where to buy at: www.mrprintglobal.com


Compact Equipment • Quiet Operation • Tool-Free Adjustments

Ensures consistent & strong pressure all over the print area to deliver uniform ink deposit.

By properly managing printing ink distribution, the Copperhead print head design increases print speeds to achieve higher production while using the least amount of print strokes.

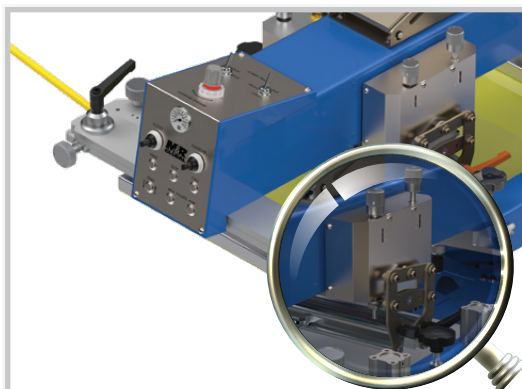

The Squeegee Equalizer System

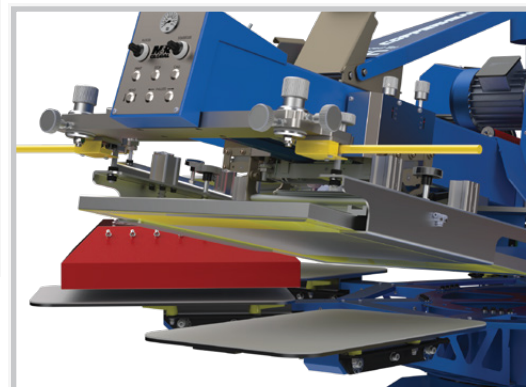

Individual mechanical head lifts assist operators for quick and easy screen cleaning

SPECIFICATIONS	PRO MAX 8/3/1F
Air @ 7 Bar (102 psi) ¹	175 L/min (6.2 cfm)
Electrical Requirements ²	208-230 V, 3 ph, 43.5A, 50/60 Hz, 8.5 kW 380-415 V, 3 ph, 43.2A, 50 Hz, 8.5 kW
Maximum In-built Flash Cure Units	3
Diameter	290 cm (114")
Maximum Frame Size	51 x 69 cm (20" x 27") OD
Maximum Image Area	36 x 34 cm (14" x 13.5")
Machine Weight	326 kg (719 lb)
Standard Pallet Size	38 x 56 cm (15" x 22")
Stations/Colors/In-built Flash	8/3/1

¹ Consumption @ 10 pieces/min; 7 bar input pressure & max image area
² Use uninterruptible power supply (UPS) to safeguard machine from voltage fluctuation out of main supply. If incoming voltage differs from the voltage(s) listed in the brochure, calculate amperage accordingly. Contact M&R Global/ your nearest dealer for total amperage in case of using additional In-head flash units.

M&R Printing Equipment, Inc. • www.mrprint.com
440 Medinah Road, Roselle, Illinois 60172-2329 USA

DCC Group • www.mrprintglobal.com
802, Kamla Executive Park, JB Nagar, Andheri (E), Mumbai, 400059, India

USA: 800-736-6431 / 630-858-6101 • Outside USA: +1-847-967-4461 • India: +91 98719-88775

M&R Printing Equipment, Inc. and its subsidiaries (hereinafter M&R), believe the information in this advertisement to be accurate at publication, though it does not purport to list all manufacturing and specification variations, nor does it assume liability resulting from incompleteness or inaccuracy. M&R reserves the right to change specifications without notice. M&R expressly disclaims any liability for damages, consequential or incidental, from purchase, installation, servicing, and/or use of any product/service based upon information herein. No warranties of merchantability or fitness for a particular purpose are made or are to be implied from the information herein. No information herein may be reproduced or used in any manner without the prior, express written consent of M&R in each case. Copyright 2022 M&R Printing Equipment, Inc. All rights reserved. 20250515