


Automatic screen printing press

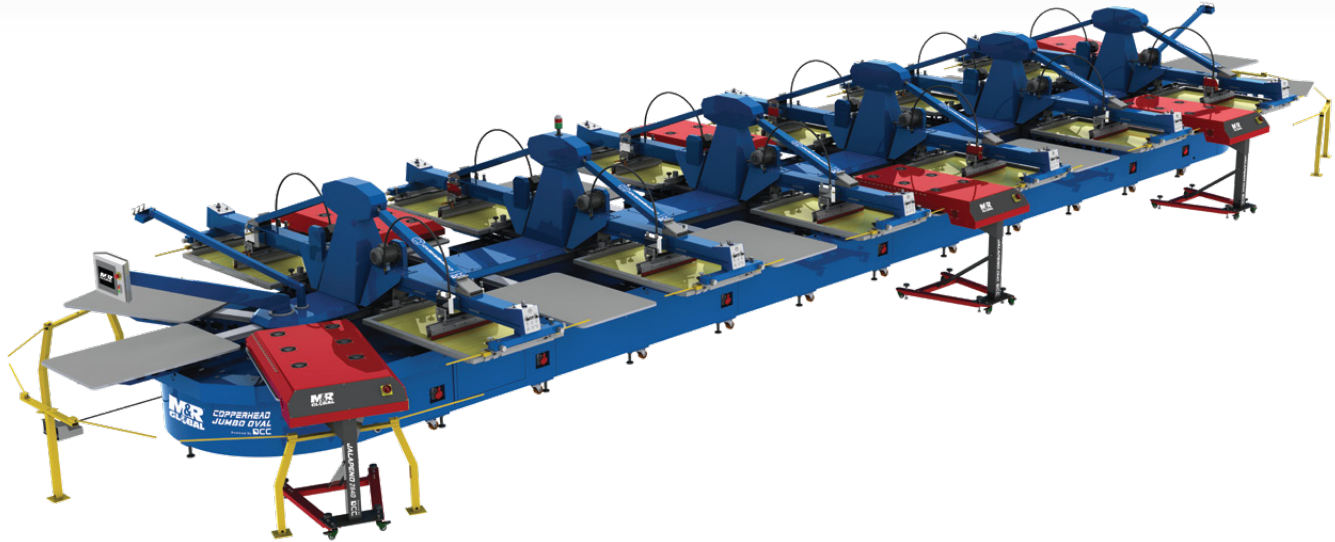

M&R Global's Copperhead Jumbo Oval sets the standard for oval format screen printing presses. With selectable printhead locations. It can be tailored to almost any production requirement, floor layout or shop size.

Jumbo Oval's 16-station base module can be expanded in 4-station increments to create 16, 20, 24, 28, 32, 36, 40, 44, 48, 52 and 56-station configurations. Other than the three pallets at each end of the press, there are no restrictions on printhead placement, so Jumbo Oval's layout can be tailored to almost any production requirement.

A high-quality, smooth-operating servo-drive indexer provides fast & accurate indexing making Jumbo Oval ideal for cut-piece and all-over print garments.

Lightweight Aluminum pallets with soft top rubber pads avoid excess overheating after flashing, which is one of the key features for printers using water base and discharge inks. Squeegee pressure equalizer system ensures uniform ink deposit to achieve consistency in color reproduction. With electric printheads, tool-free squeegee/floodbar angle adjustments, pneumatic frame locks and independent squeegee/-flood speeds provide operators with all the time-saving features needed for quick setups. The Copperhead Jumbo Oval is compatible with Tri-Loc I Series which further minimizes setup times and maximizes run times and productivity.

FEATURES


- Available up to 56 Station.
- Maximum Image Size: 71 x 102 cm (28" x 40")
- Standard Pallet Size: 76 x 122 cm (30" x 48")
- Standard Front And Rear Locking Micro-Registration
- Standard Pneumatic Frame Locks
- High-resolution Touchscreen Control Panel With Easy-to-use, Icon-based Logic And Built-in Tutorial Screens

Find more information and where to buy at: www.mrprintglobal.com


Smooth Servo Indexer • Modular Design • Production Efficiency!

Copperhead Jumbo Oval features a squeegee equalizer system with individual regulators on each head ensures uniform ink deposit for excellent print quality.

With up to 56 stations configurations, there is sure to be Copperhead Jumbo Oval that meets your needs.

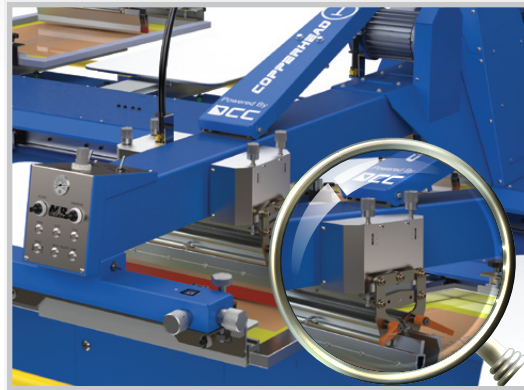

The Squeegee Equalizer System

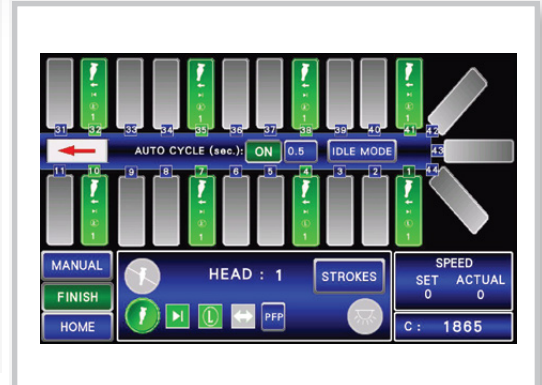

Digital touch-screen control panel with icon-based labeling simplifies press operation

SPECIFICATIONS	JUMBO OVAL 71102 16/6	JUMBO OVAL 71102 20/8	JUMBO OVAL 71102 24/10	JUMBO OVAL 71102 28/12	JUMBO OVAL 71102 32/14	JUMBO OVAL 71102 36/16
Air @ 7 Bar (102 psi)	1100 l/min (39 cfm)	1430 l/min (51 cfm)	1760 l/min (62 cfm)	2090 l/min (74 cfm)	2420 l/min (86 cfm)	2750 l/min (97 cfm)
Electrical Requirements ¹	380-415 V, 3 ph, 11.5 A, 50 Hz, 4 kW	380-415 V, 3 ph, 11.5 A, 50 Hz, 4.75 kW	380-415 V, 3 ph, 12.5 A, 50 Hz, 5.5 kW	380-415 V, 3 ph, 16.5 A, 50 Hz, 6.25 kW	380-415 V, 3 ph, 16.5 A, 50 Hz, 7 kW	380-415 V, 3 ph, 16.5 A, 50 Hz, 7.75 kW
Standard Built-in Flash Curing Unit Plugs	3	4	5	6	7	8
Maximum Image Size (Alternating Heads)	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")
Standard Pallet Size	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")
Minimum Pallet Size	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")
Maximum Frame Size (OD)	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")
Maximum Image Size (Adjacent Heads)	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")
Machine Dimensions (L x W x H)	970 x 433 x 185 cm (382" x 171" x 73")	1186 x 433 x 185 cm (467" x 171" x 73")	1402 x 433 x 185 cm (552" x 171" x 73")	1618 x 433 x 185 cm (637" x 171" x 73")	1834 x 433 x 185 cm (722" x 171" x 73")	2050 x 433 x 185 cm (807" x 171" x 73")

SPECIFICATIONS	JUMBO OVAL 71102 40/18	JUMBO OVAL 71102 44/20	JUMBO OVAL 71102 48/22	JUMBO OVAL 71102 52/24	JUMBO OVAL 71102 56/26
Air @ 7 Bar (102 psi)	3080 l/min (109 cfm)	3410 l/min (120 cfm)	3740 l/min (132 cfm)	4070 l/min (144 cfm)	4400 l/min (155 cfm)
Electrical Requirements ¹	380-415 V, 3 ph, 21 A, 50 Hz, 8.5 kW	380-415 V, 3 ph, 21 A, 50 Hz, 9.25 kW	380-415 V, 3 ph, 33 A, 50 Hz, 13.65 kW	380-415 V, 3 ph, 33 A, 50 Hz, 14.4 kW	380-415 V, 3 ph, 37 A, 50 Hz, 15.15 kW
Standard Built-in Flash Curing Unit Plugs	9	10	11	12	13
Maximum Image Size (Alternating Heads)	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")	71 x 102 cm (28" x 40")
Standard Pallet Size	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")	76 x 122 cm (30" x 48")
Minimum Pallet Size	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")	31 x 46 cm (12" x 18")
Maximum Frame Size (OD)	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")	86 x 135 cm (34" x 53")
Maximum Image Size (Adjacent Heads)	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")	61 x 102 cm (24" x 40")
Overall Size (L x W x H)	2266 x 433 x 185 cm (892" x 171" x 73")	2482 x 433 x 185 cm (977" x 171" x 73")	2698 x 433 x 185 cm (1062" x 171" x 73")	2914 x 433 x 185 cm (1147" x 171" x 73")	3130 x 433 x 185 cm (1232" x 171" x 73")

¹ Use uninterruptible power supply (UPS) to safeguard machine from voltage fluctuation out of main supply. If incoming voltage differs from the voltage(s) listed in the brochure, calculate amperage accordingly. Contact M&R Global/ your nearest dealer for total amperage in case of using built-in flash sockets.

M&R Printing Equipment, Inc. • www.mrprint.com
440 Medinah Road, Roselle, Illinois 60172-2329 USA

DCC Group • www.mrprintglobal.com
802, Kamla Executive Park, JB Nagar, Andheri (E), Mumbai, 400059, India

USA: 800-736-6431 / 630-858-6101 • Outside USA: +1-847-967-4461 • India: +91 98719-88775